


Illumination System Diagram


RING LIGHT SYSTEMS

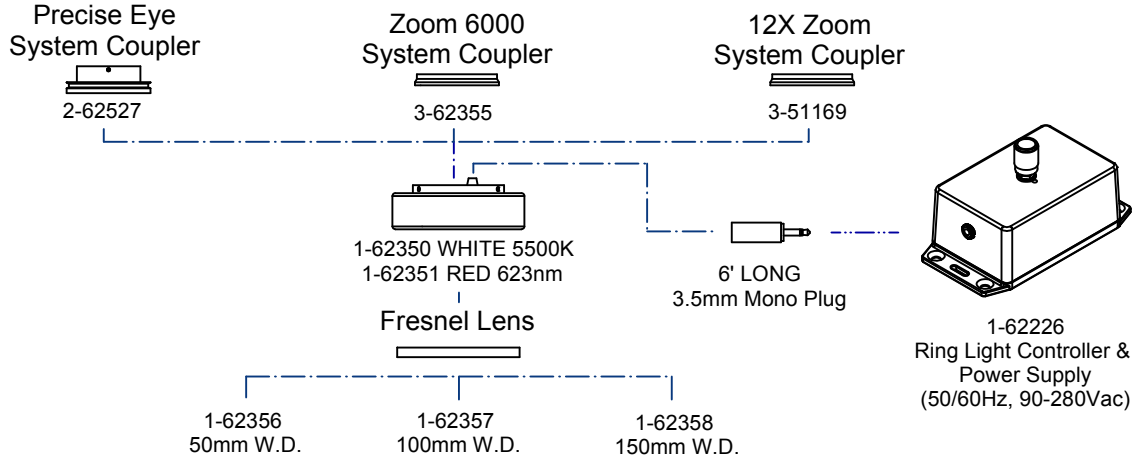

ADJUSTABLE COAXIAL LED ASSEMBLIES

ILLUMINATORS:

- 1-40086 NEUTRAL WHITE (4100K*)
- 1-40087 COOL WHITE (6500K*)
- 1-40088 WARM WHITE (3100K*)
- 1-40089 GREEN (530nm*)
- 1-40090 CYAN (505nm*)
- 1-40091 BLUE (470nm*)
- 1-40092 ROYAL BLUE (447.5nm*)
- 1-40106 RED (627nm*)
- 1-40093 RED-ORANGE (617nm*)
- 1-40094 AMBER (590nm*)

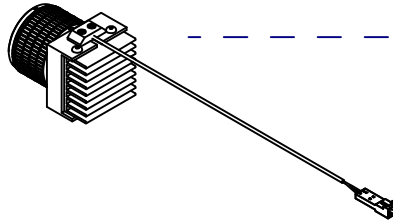

1-40096
Zoom 6000 & Precise Eye
ADJUSTABLE
LED COUPLER




1-40095
12X ADJUSTABLE
LED COUPLER

BRIGHTLIGHT ASSEMBLIES

ILLUMINATORS:

- 1-40028 NEUTRAL WHITE (4100K*)
- 1-40029 COOL WHITE (6500K*)
- 1-40030 WARM WHITE (3100K*)
- 1-40031 GREEN (530nm*)
- 1-40032 CYAN (505nm*)
- 1-40033 BLUE (470nm*)
- 1-40034 ROYAL BLUE (447.5nm*)
- 1-40035 RED (627nm*)
- 1-40036 RED-ORANGE (617nm*)
- 1-40037 AMBER (590nm*)

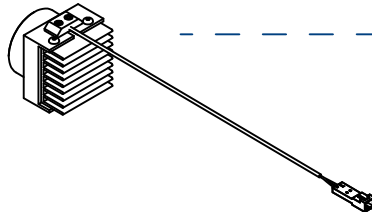


1-40046
Zoom 6000 & Precise
Eye
LED COUPLER



1-40049
12X LED COUPLER


CONTROLLERS




INTERFACE CABLES:

- 1-40181 LED CABLE (.5 meter)
- 1-40182 LED CABLE (1 meter)
- 1-40183 LED CABLE (2 meters)
- 1-40184 LED CABLE (3 meters)

1-40042
350mA/700 mA
DESKTOP CONTROLLER



1-40045
350mA/700mA
FLANGE MOUNT CONTROLLER



Values are typical. See website for tolerances*
*** USB, RS-232, & POWER SUPPLY INCLUDED ***